



Product Datasheet: 1500ml/min Silencer Series

All Diener pumps are customized to suit your requirements: the information below represents one of the possibilities...




The Silencer series is everything a gear pump should be: simple, leak-free, chemically inert, reliable, and economical. It's manifold mounting simplifies the plumbing, further reducing the installed cost in your system. A magnetic coupling ensures the pump will never leak and wetted materials are chosen to withstand a wide range of aggressive chemicals. The enhanced gears and shaft bearings have been optimized to ensure a long, trouble-free life and very low power consumption. And of course we manufacture every component is manufactured using Diener's legendary production techniques, resulting in a very high quality product at a relatively low cost.

- Magnetically Coupled: No seal leaks
- Low Power Consumption: Very little heat transfer to fluid
- Inert Construction Materials: Compatible with wide range of
- Compact: BLDC motor is incorporated into pump
- Extremely Quiet: Ideal for OEM equipment
- 24 volt BLDC motor: long life and maintenance-free

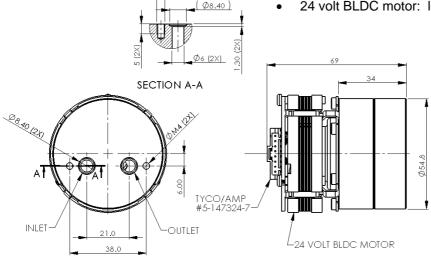

DIMENSIONAL OUTLINE DRAWING [mm]

Typical Performance Curve: Water at Room Temperature

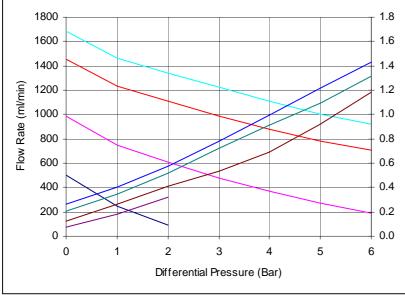

Specifications

Performance:

Max. continuous pressure: 4 bar Max. intermittent pressure: 6 bar Max. static Case pressure: 20 bar

Inlet: Self-priming

Speed range: 300-3500 rpm

Fluid viscosity range: 0.3 to 1000 cps

Electrical:

Supply voltage: 24vdc Rotation: Bi-directional

BLDC controller: Customer to provide

(consult factory)

Max. current: 1.5 amps Max. output power: 35 watts 8-pin Tyco/AMP connector

Temperature:

Fluid temperature range: 0-80°C Ambient air temp. range: 0-60°C Relative humidity range: 0-95% noncondensing

Construction:

Standard: 316L stainless steel, PEEK®,

EPDM

Optional: 304 SS, Alloy-C, PPS, Teflon®,

Silicone, Viton®, Kalrez

Inlet/Outlet: Manifold mounted with o-ring glands to fit -008 o-ring

Marking: Permanent laser-mark identifi-

cation for 100% traceability.

Mass: 0.8 kg


Flow: 1000rpm

Flow: 3000rpm Flow: Full Speed

Amps: 1000 rpm

Amps: 2000 rpm Amps: 3000 rpm

(ambs)



None of the information supplied by Diener Precision Pumps constitutes a warranty regarding product performance or use. Any information regarding performance or use is only offered as suggestion for investigation for use, based upon Diener Precision Pump's or other customer experience. DPP makes no warranties, expressed or implied, concerning the suitability or fitness of any of its products for any particular purpose. It is the responsibility of the customer to determine that the product is safe, lawful and technically suitable for the intended use. The disclosure of information herein is not a license to operate under, or a recommendation to infringe any patents.

QF3222i Product Datasheet Version: 15-02-08 Released: QM Page: 1(1) Engineering